

VA | CARAVAN

SEASONAL COVER

VA-Caravan is an easy-to-use seasonal cover for protecting recreational vehicles and caravans. The cover is always designed specifically to best suit your model. VA-Caravan is suitable for all winter storage and seasonal locations as well as camping sites. You can move the vehicle/caravan even with the cover installed on the roof.

Protects from dirt and weather

- Protects the roof of your vehicle or caravan from UV radiation.
- It also acts as a heat shield, making it easier to keep the interior cooler.
- The cover prevents dirt, leaves, etc. from collecting on the roof.
- It also reduces the noise caused by rainfall.
- In winter, VA-Caravan protects your vehicle or caravan from ice and snow. It can withstand a snow load of 30–40 cm. Once the temperature rises above zero, the snow will fall off the cover on its own thanks to the slippery outer surface of the cover.

The seasonal cover only weighs approximately 15 kg, so it is lightweight yet durable. The fabric parts are made of UV-protected weather-resistant PVC/PU blend and the frame is made of Excel fiberglass parts. Installing the seasonal cover is easy and fast.

The cover fits a small space and is delivered in its own storage bag. The affordable covers are high-quality Finnish products. All VA-Caravan products are always manufactured model-specifically. To place an order, you need to give us certain measurements of your recreational vehicle or caravan, information about its make and model and a picture taken from the side of the vehicle/caravan.

READ BEFORE USE!

If VA-Varuste does not have the pattern for the seasonal vehicle/caravan cover concerned, the cover can be made in accordance with the dimensions the customer provides. In this case, the customer supplies the requested dimensions and a photo of the motor home / caravan. The customer is responsible for the accuracy of the dimensions given. The cover is made on the basis of the dimensions provided. Alternatively, the item can be brought to VA-Varuste for measurement and the designer in charge will take the dimensions.

OBSERVE THE FOLLOWING IN INSTALLATION:

The seasonal cover should be fitted in the working order described in the instructions. Installation in the wrong order can cause problems with the suitability of the product. A product installed in a faulty manner can become damaged or cause harm.

Before you fit the seasonal cover in place, ensure that the motor home / caravan is clean. The mounting of a seasonal cover against, for instance, a sandy surface can result in surface damage to the vehicle.



After you have installed the seasonal cover on top of your motor home / caravan, check that the cover parts and tension bands are tight enough. First adjust the back and front bands and then the side tension bands. Tension bands that are loose can, for example, scuff the surface and cause damage. Check the tightness of the bands every so often. After installation, the seasonal cover may seek the right position against windy weather, so tightening it afterwards is important!

Do not drive the vehicle in traffic with a VA-Caravan seasonal cover mounted! The seasonal cover model enables transfer of the vehicle even if the cover is installed. When moving your motor home, the front seasonal cover should be detached for the transfer. When transferring the vehicle, you should drive at a minimal parking area speed. The possibility to move a vehicle with a seasonal cover is intended only for short transfers: for example, moving a vehicle/caravan away from a snow removal area. The driver of the vehicle is responsible for the transfer.

If you notice a fault or any suitability problems in the product, contact the manufacturer as soon as possible.

SEASONAL COVER INSTALLATION INSTRUCTIONS


- 1 Start spreading the canopy roof section from the rear of the vehicle. Perform the installation from the **right-hand side** of the vehicle / caravan. Before spreading the cover, check that the rear edge is the correct distance from the edge of the roof. The distance is correct when the foam rubber pieces fit well between the rail and the roof edge.

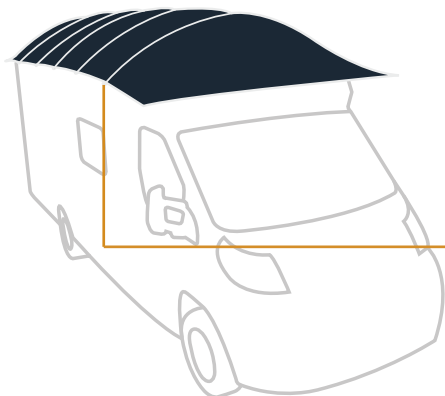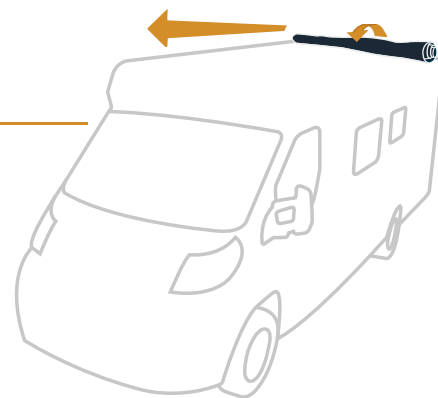


- 2 Place the cellular foam pads at a suitable spot between the aluminium rail and the front edge of the roof.



- 3 Position the plastic pads the same way as in the picture, and tighten the tension belt hooks to the roof section. Connect the front and back tension belts at the correct point on the lower part of the vehicle body. The tension belts on the side should be pulled below the recreational vehicle / caravan and attached to the other side. First tighten up the back and front cords and then adjust the drawstrings at the side, pulling them tight.

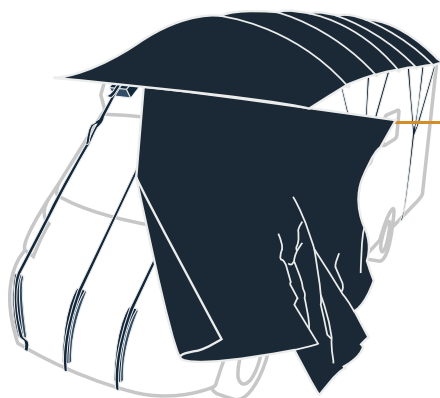

- 4 Slide the front and back covers in the rails.

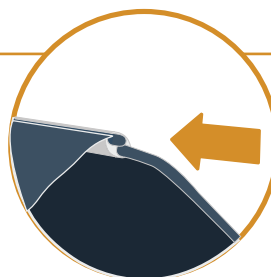

- 5 Finally, attach the front and back shield drawcords from the correct locations to the lower part of the body.

